
GOTA COACH INSTRUCTIONS -- FIRST THING WHEN THE OPERATOR OR COACH CHANGES

TYPE CNTRL-S

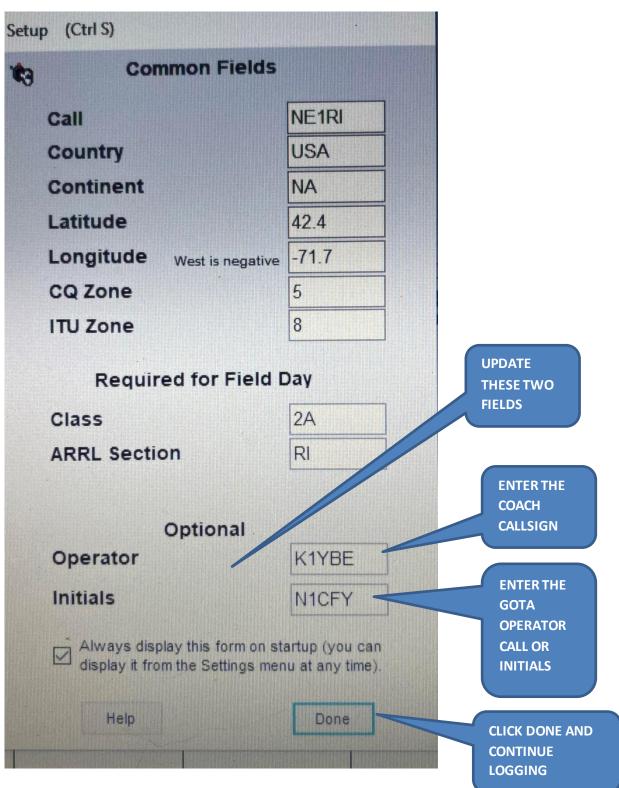

LOGGING PROGRAM DETAILS AND LINKS FOR MORE INFORMATION

Logging program name: ARRL Field Day Contest Log

Web Site: n3fjp.com

NCRC Registration no.: 38077

COACH to do at beginning of shift: control-s to display settings

Enter: your call sign (NOT the club's call, NOT your initials, please) in the optional box labeled "Operator"

Enter the operator call sign or operator intials (if not a ham) in the "Initials" box

At bottom: band & mode auto update from K3 radio. If not, contact an expert or the GOTA lead.

Do not reprogram the K3 alone.

At bottom: Call (NE1RI), Class (2A) Section (RI) are read from the control-s operators setup.

Operating tips for Phone ops:

NEVER say "Please copy" or "Copy". It wastes time.

If searching & pouncing say: Remote station call, two alpha, romeo india

Data Entry:

Enter the remote station call, tab or spacebar, enter class, tab or space bar, enter section, hit return.

Tab or spacebar is OPTIONAL. To save two key strokes, enter:

Enter his/her call, class and section all in one stream of characters. The program is smart enough to place the class & section in the right boxes. Hit return to log.

To clear all: hit ESC

To edit logged QSO: click on the QSO

To delete a logged QSO: click on the QSO

To display F Keys (CW ops): control shift w

To display shortcuts: click on the help menu

To display operator settings: control s

At end of shift: hit control s, enter new operators call in the INITIALS boxes under the Optional Heading.

Backup: its automatic, no worries.

Here's a 2 min video showing how to use this logging program (skip the ad)

https://www.youtube.com/watch?v=DJEIXuoKWqc